

Gigabit PCI Express Network Adapter

TG-3468

⦿ Features:

- Featured a 10/100/1000Mbps auto-negotiation RJ45 port, eliminating manual switching
- Backward compatible with 100Mbps Fast Ethernet products
- Remotely power on/ off your computer with WOL, ideal for centralized management
- LED indicators for monitoring speed and link/activity
- Supports IEEE 802.1Q VLAN Tagging and 802.1p Layer 2 Priority Encoding for better network performance and security



⦿ Description:


The PCI Gigabit Express Network Adapter TG-3468 is a high performance adapter designed for the high-speed PCI Express Bus Architecture. Featured 10/100/1000Mbps auto-negotiation speed, 802.3x flow control and Wake-on-LAN technology, TG-3468 is a highly integrated and cost-effective Gigabit Ethernet Adapter, a good selection to upgrade your network.

⦿ Specifications:

HARDWARE FEATURES	
Standards and Protocols	IEEE 802.3, 802.3u, 802.3ab, 802.3x, 802.1q, 802.1p, CSMA/CD, TCP/IP
Interface	32-bit PCI Express 1 10/100/1000Mbps RJ45 port
Network Media	10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 100BASE-TX: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 1000Base-T: UTP category 5, 5e cable (maximum 100m)

Data Rates	10/100/1000Mbps for Half-Duplex mode 20/200/2000Mbps for Full-Duplex mode
LED Indicator	1000Mbps Link/Act, 100Mbps Link/Act, 10Mbps Link/Act
Flow Control	IEEE 802.3x Flow Control (Full-Duplex)
OTHERS	
Certification	CE, FCC, RoHS
System Requirements	Windows 7(32/64bits), Windows Vista(32/64 bits), Window XP(32/64bits)
Environment	Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing

Diagram:

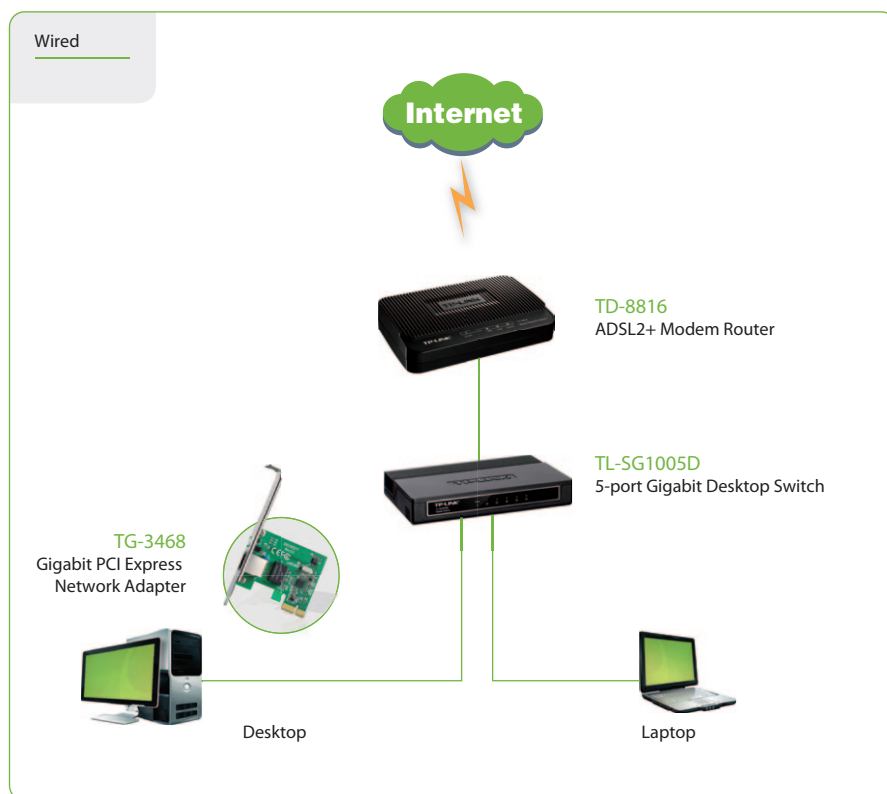

Package:

- Gigabit PCI Express Network Adapter TG-3468
- Resource CD
- Quick Installation Guide

Related Products:

- ADSL2+ Modem Router TD-8816
- 5-Port Gigabit Desktop Switch TL-SG1005D